




How to install the 928 Motorsports, LLC **Fire Extinguisher Seat Mount**



Please read all of these instructions before beginning. We show two different ways to install the fire extinguisher mounts, so you can use the method that is easiest for you.

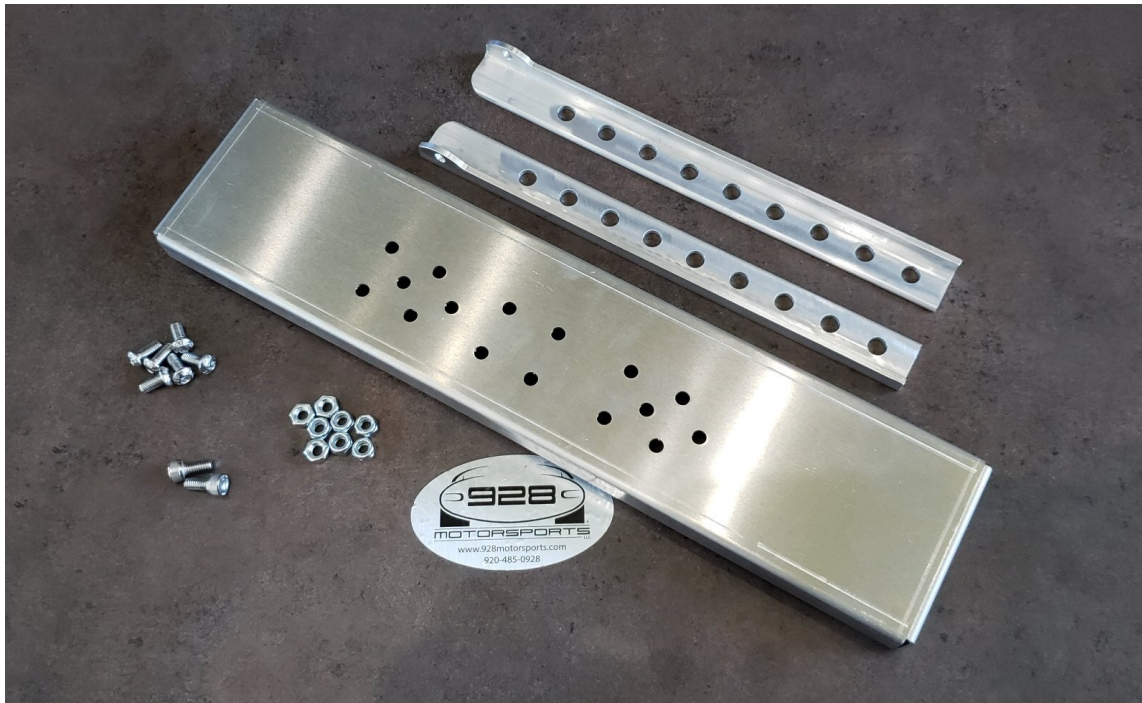


Assembly

Step A1: Mount one Seat Mount to the end of the Center Mount with the socket head screw and a nylock nut provided as shown. Repeat this process on the other side as well.

Step A2: Optional: Mount your fire extinguisher mount to the Center Mount now. This is optional at this time, but easier than doing it later. We have provided 8 button headed fasteners and nylock nuts for this.



Your extinguisher mount, ready to be installed in the car, should look like this:

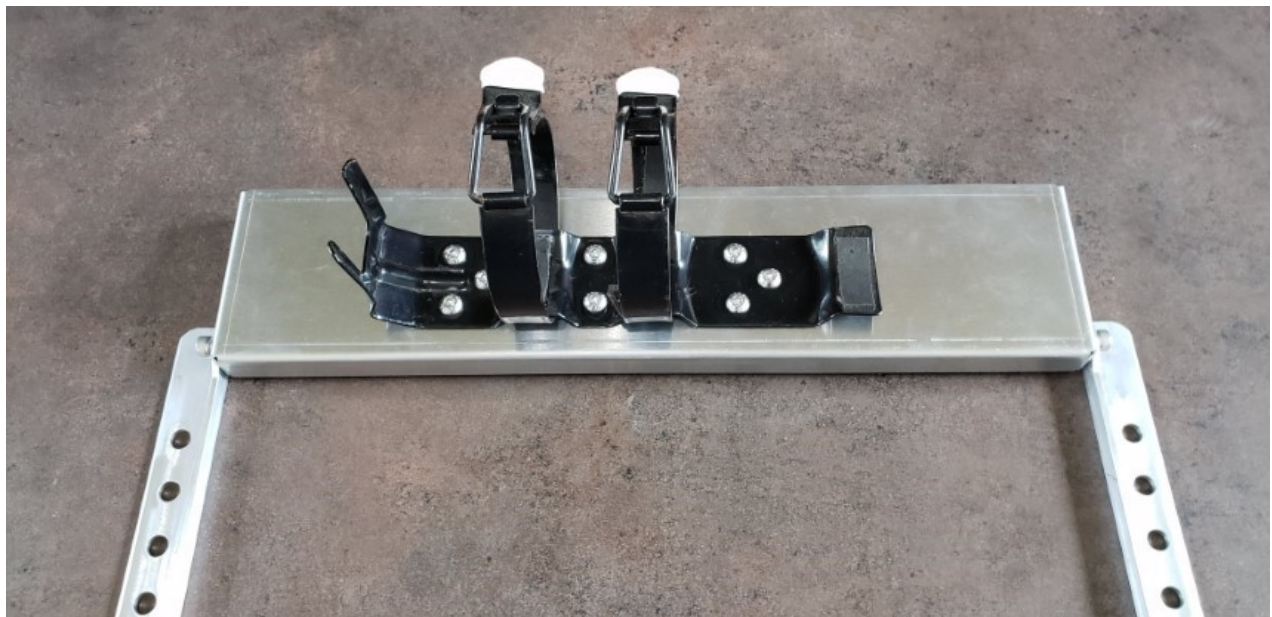



Installation

Decide whether you would like to have your fire extinguisher attached to the Left or the Right side seat. It can be installed on either, and the installation process is the same.

The fire extinguisher mount does not move forward and back with the seat. This is because it will be bolted to the car, not bolted to the seat. So decide what is the furthest forward you will ever position the seat before beginning installation. If this is a two-driver car, it would be the seat position of the shortest of the two drivers. Take note of where that position is.

Step 1: Put the seat back all the way to expose the forward mounting fasteners.

Step 2: Remove the floor mats on this side. It will give you more room to work.

Step 3: Remove one bolt in the front of each seat rail that hold the seat down.

They are M6 Allen-headed as shown in this picture.





When you remove the bolts, on some cars the block-nut will drop down on to the floor. Slide a bar magnet under the seat rail and pull it out for later.



Step 4: Put the assembly into place as shown in these pictures. Line up the seat mounts so they slide into and under the seat slider as shown. I find it is easiest to press back on the headrest area of the seat with one hand while doing this. That tips the seat back and makes it easier to get the seat mounts to slide in.





You may find that you cannot slide the mounts in as far as you want to before they hit a hard stop. This is usually because you are mounting the extinguisher on seats that are adjusted far back for long-legged people.

We made our Seat Mounts long so that our short-legged friends who need the seats moved way up can use them.

So if the mounts are too long for you, just cut off the unneeded section of the Seat Mount and continue on.



In this picture, the Seat Mounts have been shortened and it is ready for installation.





Step 5: Line up the holes in the Seat Mount to your desired location, and install the mounting bolts.



Optional Installation Method

On some cars, it may be easier to install the Seat Mounts first by themselves, then attach the center section afterwards.





Step 6: Put your floor mats back in, and press the front of the fire extinguisher mount down. The front of the mount will pivot down to rest on the floorboards or your floor mats.

Place your fire extinguisher in the mount, and you are done.

Adjustments: Flipping the center mounting section around will move the extinguisher closer or further away from your seat and legs. You may also move the whole assembly forward or back by how much of the Seat Mounts you slide under your seat.

